

N-Ch 500V Fast Switching MOSFETs

- ★ 100% EAS Guaranteed
- ★ Green Device Available
- ★ Excellent CdV/dt effect decline
- ★ Advanced VD MOSFETS

Product Summary





BVDSS	RDSON	ID
500V	2.8Ω	3A

Description

The UD3N50FR is the Advanced VD N-ch MOSFETS, which provide excellent RDSON and gate charge for most of the synchronous buck converter applications.

The UD3N50FR meet the RoHS and Green Product requirement 100% EAS guaranteed with full function reliability approved.

TO252 Pin Configuration



Absolute Maximum Ratings

Symbol	Parameter	Value	Units
V _{DSS}	Drain-Source Voltage	500	V
I _D	Drain Current - Continuous (TC= 25°C) - Continuous (TC= 100°C)	3	A
		1.8	A
I _{DM}	Drain Current - Pulsed (Note 1)	12	A
V _{GSS}	Gate-Source Voltage	± 30	V
E _{AS}	Single Pulsed Avalanche Energy (Note 2)	67	mJ
I _{AR}	Avalanche Current (Note 1)	5	A
E _{AR}	Repetitive Avalanche Energy (Note 1)	63	mJ
dv/dt	Peak Diode Recovery dv/dt (Note 3)	5	V/ns
P _D	Power Dissipation (TC = 25°C) - Derate above 25°C	100	W
		0.2	W/°C
T _j , T _{stg}	Operating and Storage Temperature Range	-55 to +150	°C
T _L	Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds	300	°C

Thermal Characteristics

Symbol	Parameter	Value	Units
R _{θJC}	Thermal Resistance, Junction-to-Case	1.25	°C/W
R _{θJS}	Thermal Resistance, Case-to-Sink Typ.	--	°C/W
R _{θJA}	Thermal Resistance, Junction-to-Ambient	110	°C/W

N-Ch 500V Fast Switching MOSFETs

Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
V(BR)DSS	Drain-Source Breakdown Voltage	$V_{GS} = 0V, I_D = 250\mu A$	500	550	--	V
IDSS	Zero Gate Voltage Drain Current	$V_{DS} = 500V, V_{GS} = 0V, T_J = 25^\circ\text{C}$	--	--	1	μA
IGSS	Gate-Source Leakage	$V_{GS} = \pm 30V$	--	--	± 100	nA
VGS(th)	Gate-Source Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250\mu A$	2.0	3.0	4.0	V
RDS(on)	Drain-Source On-Resistance (Note3)	$V_{GS} = 10V, I_D = 1.5A$	--	2.8	3.5	Ω
Ciss	Input Capacitance	$V_{GS} = 0V, V_{DS} = 25V, f = 1.0\text{MHz}$	--	250	--	pF
Coss	Output Capacitance		--	45	--	
Crss	Reverse Transfer Capacitance		--	5	--	
Qg	Total Gate Charge	$V_{DD} = 480V, I_D = 1A, V_{GS} = 10V$	--	6.5	--	nC
Qgs	Gate-Source Charge		--	1.6	--	
Qgd	Gate-Drain Charge		--	2.4	--	
td(on)	Turn-on Delay Time	$V_{DD} = 250V, I_D = 3A, R_G = 25\Omega$	--	7.8	--	ns
tr	Turn-on Rise Time		--	33	--	
td(off)	Turn-off Delay Time		--	13	--	
tf	Turn-off Fall Time		--	59	--	
IS	Continuous Body Diode Current	$T_C = 25^\circ\text{C}$	--	--	3	A
ISM	Pulsed Diode Forward Current		--	--	12	A
VSD	Body Diode Voltage	$T_J = 25^\circ\text{C}, I_{SD} = 3A, V_{GS} = 0V$	--	--	1.4	V
trr	Reverse Recovery Time	$V_{GS} = 0V, I_S = 3A, di_F/dt = 100A / \mu s$	--	190	--	ns
Qrr	Reverse Recovery Charge		--	0.53	--	μC

Note :

- 1、The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.
- 2、The EAS data shows Max. rating . IAS = 2.4A, VDD = 50V, RG = 25 Ω , Starting TJ = 25 $^\circ\text{C}$
- 3、The test condition is Pulse Test: Pulse width $\leq 300\mu s$, Duty Cycle $\leq 2\%$
- 4、The power dissipation is limited by 150 $^\circ\text{C}$ junction temperature
- 5、The data is theoretically the same as ID and IDM , in real applications , should be limited by total power dissipation.

N-Ch 500V Fast Switching MOSFETs

Typical Characteristics

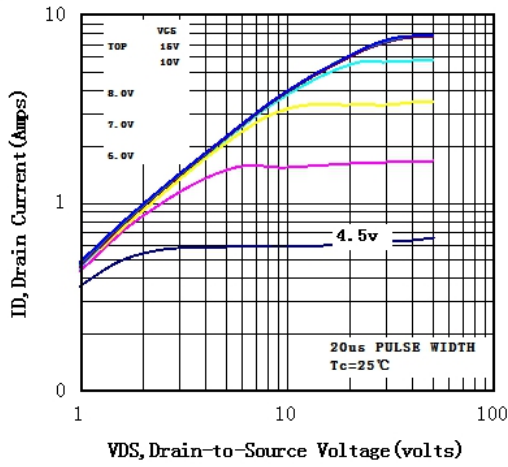


Fig1 Typical Output Characteristics, Tc=25°C

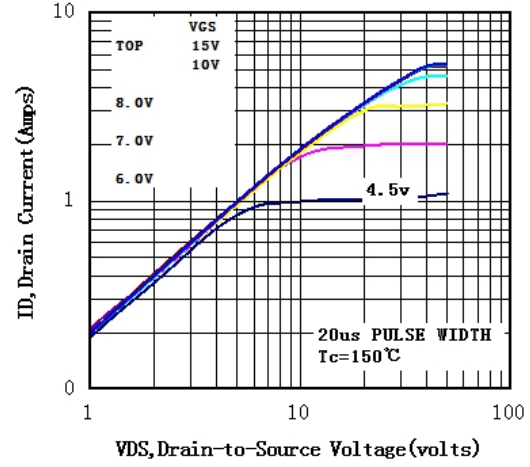


Fig2 Typical Output Characteristics, Tc=150°C

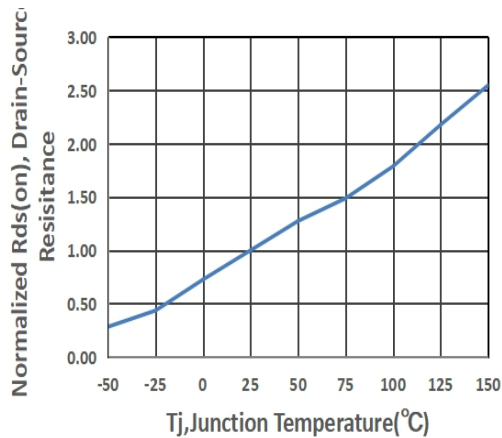


Fig3 Normalized On-Resistance Vs. Temperature

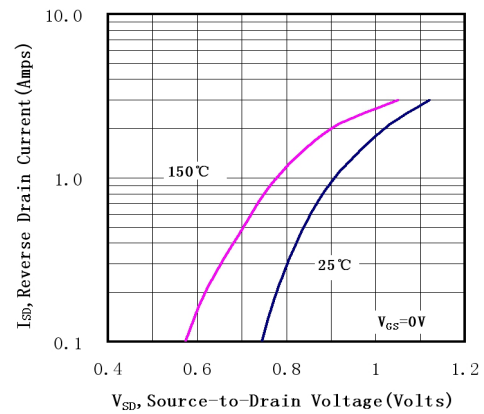


Fig4 Typical Source-Drain Diode Forward Voltage

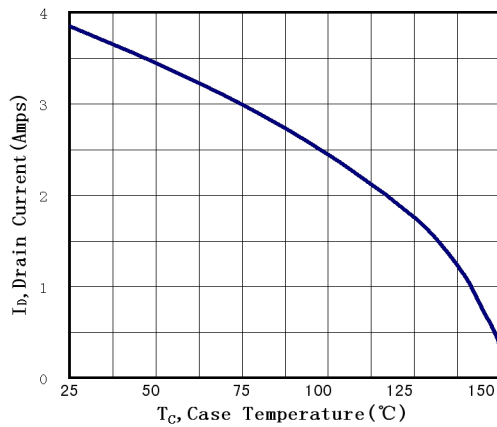


Fig5 Maximum Drain Current Vs. Case Temperature


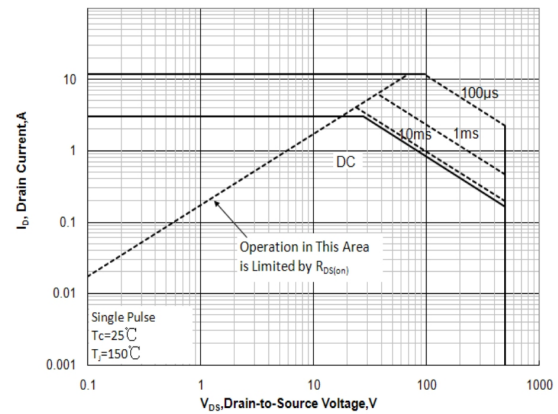



Fig6 Maximum Safe Operating Area

N-Ch 500V Fast Switching MOSFETs


Gate Charge Test Circuit & Waveform

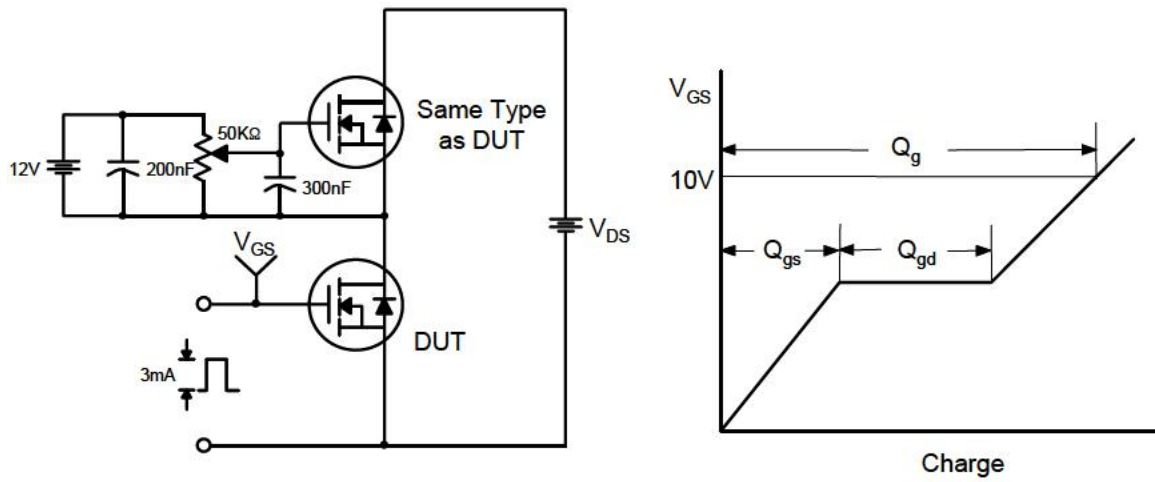

Resistive Switching Test Circuit & Waveforms

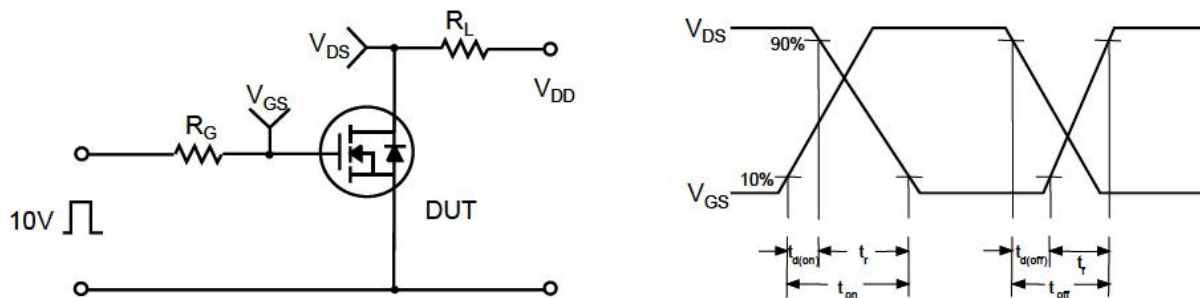


Unclamped Inductive Switching Test Circuit & Waveforms

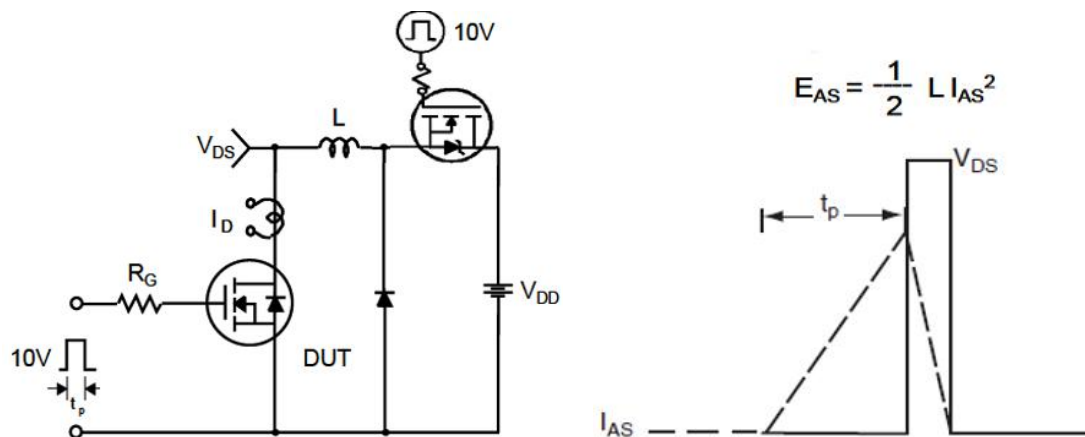


N-Ch 500V Fast Switching MOSFETs

Package Mechanical Data-TO-252

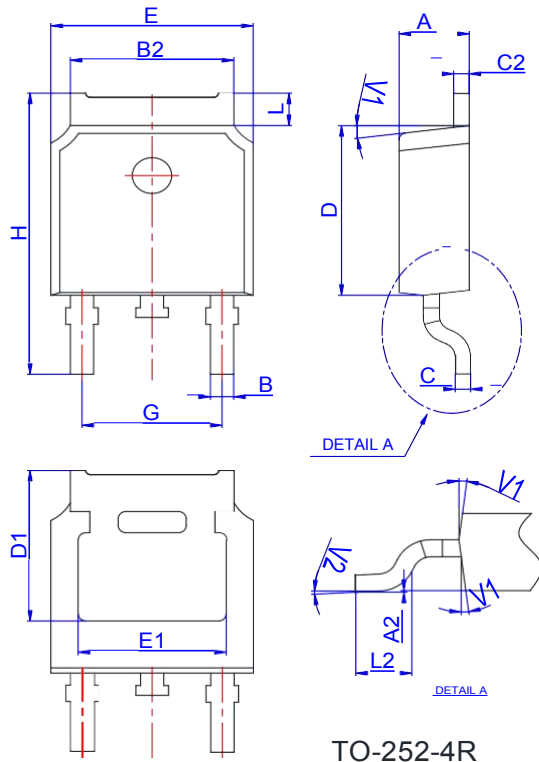

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	2.10		2.50	0.083		0.098
A2	0		0.10	0		0.004
B	0.66		0.86	0.026		0.034
B2	5.18		5.48	0.202		0.216
C	0.40		0.60	0.016		0.024
C2	0.44		0.58	0.017		0.023
D	5.90		6.30	0.232		0.248
D1	5.30REF			0.209REF		
E	6.40		6.80	0.252		0.268
E1	4.63			0.182		
G	4.47		4.67	0.176		0.184
H	9.50		10.70	0.374		0.421
L	1.09		1.21	0.043		0.048
L2	1.35		1.65	0.053		0.065
V1		7°			7°	
V2	0°		6°	0°		6°

Reel Specification-TO-252

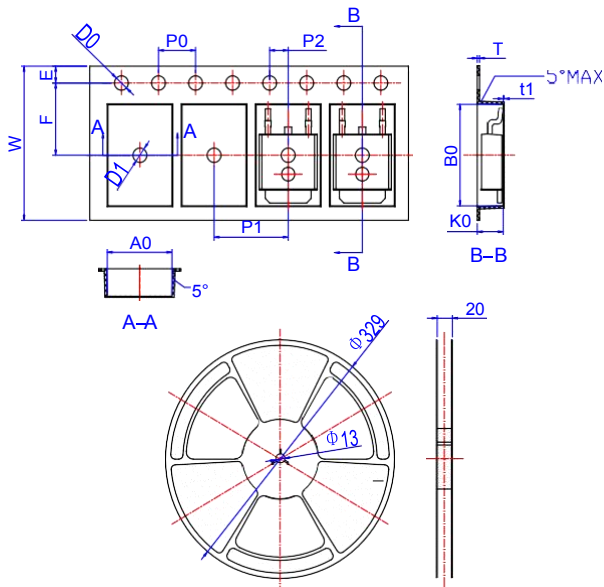

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
W	15.90	16.00	16.10	0.626	0.630	0.634
E	1.65	1.75	1.85	0.065	0.069	0.073
F	7.40	7.50	7.60	0.291	0.295	0.299
D0	1.40	1.50	1.60	0.055	0.059	0.063
D1	1.40	1.50	1.60	0.055	0.059	0.063
P0	3.90	4.00	4.10	0.154	0.157	0.161
P1	7.90	8.00	8.10	0.311	0.315	0.319
P2	1.90	2.00	2.10	0.075	0.079	0.083
A0	6.85	6.90	7.00	0.270	0.271	0.276
B0	10.45	10.50	10.60	0.411	0.413	0.417
K0	2.68	2.78	2.88	0.105	0.109	0.113
T	0.24		0.27	0.009		0.011
t1	0.10			0.004		
10P0	39.80	40.00	40.20	1.567	1.575	1.583